


Thank you for purchasing the DP-DMX4B by *American DJ®*. For your convenience, this DP-DMX4B has been tested and is ready to be used, there is no assembly required.

Product Descriptions:

The DP-DMX4B is a 4 channel DMX dimmer pack, it can extend to a maximum of 512 channels using DMX 512 protocol. The DP-DMX4B features include: zero-crossing circuitry for protection of inductive loads; each 3-prong Edison sockets for each channel; individual 6 A fuse for each channel; XLR connection and a maximum output load of 5A per channel or 20A total.


General Functions:

1. **Channel Output:** 5A per channel, Total 20A
2. **Channel LEDs:** These LEDs indicate the dimming, On/Off of the appropriate channels.
3. **DMX Dip Switches:** Slide these dip switches to select desired DMX address(DMX addressing is printed on the top cover of the DP-DMX4B.)
4. **Power LED:** The LED is lit when power is on.
5. **DMX LED:** This LED begins flashing when DMX signal is present.
6. **Power Switch:** Turns on/off the main power.
7. **POWER INPUT:** AC 120V~60Hz, 20A max.
8. **DMX Input:** This connector accepts your DMX input signals.
9. **DMX Output:** This connector sends your DMX input signal through to the next DMX device.

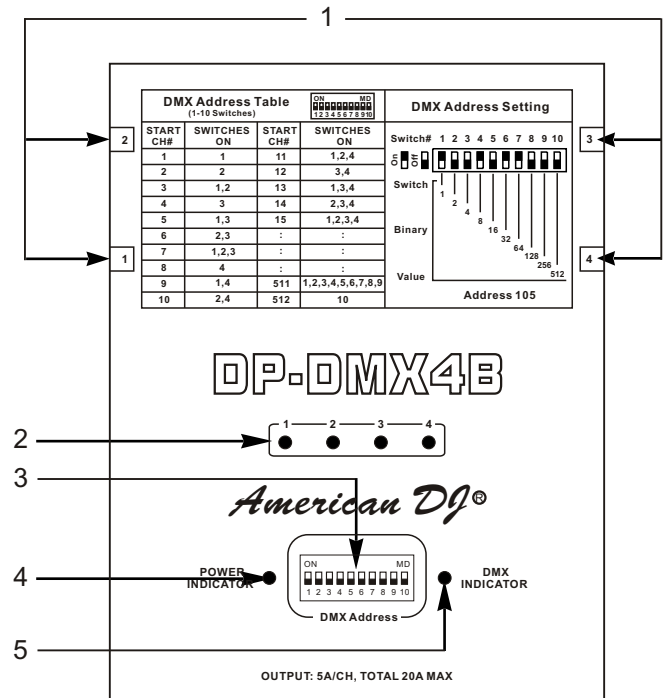

Technical Specifications:

- Power Input AC 120V~60Hz, 20A max.
 Channel Output 5A/CH., Total 20A
 Fuse(Internal) F6A 250V 5x20mm(x4PCS)
 Dimensions 197x124x60mm
 Weight 1.2 Kg

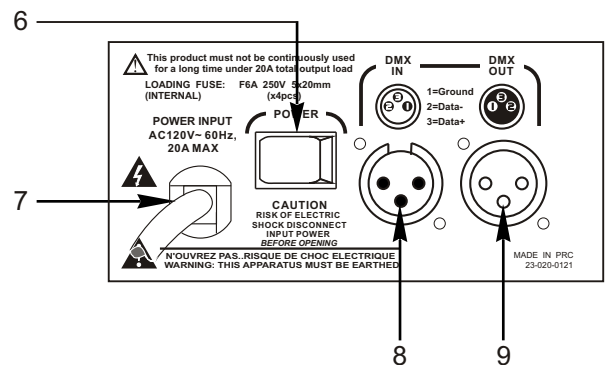

CAUTION! No user serviceable parts inside do not attempt repairs. In the event your unit should fail, contact your *American DJ®* dealer.

WARNING! This Product must be earthed. This product is intended for indoor use only. To prevent fire or shock hazard, do not expose this product to a high temperature or high humidity area.